		Order Form		Joki	ER C	ARBOI
Date User name	ortésica protésica	garo		\	Rigid frame	wheelchair
Responsible						
Seat width (LS)	□ 36	Wheelchair mea	sures □ 42	□ 45	□ 48	
Seat depth (PS)	\Box 37,5 part of the seat cloth to the ba	☐ 40 ackrest tube will be 1,5	\Box 42,5 cm more than the de	☐ 45 clared one.	□ 47,5	□ 50
Footplate distance (DP)	(Real distance betw plate to the floor minimum 4	een seat and footplate) cm.!! (Minimum Front h				
Setting	* Standard	□ Prudential	□ Active	□ Extrem	e	
Backrest Height (TS)	Std.Value 33,5	(min 24.5-max	47)			
camber	☆ 0° □ 2° □ 4°					
Alluminum rear adjustment pla		paque transparen	t painting			
 FULL CARBON rear adjustmer (Lightest configuration) ★ Vet 	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre si	ight sideguard udguard traight sideguard nudguard - Polished ABLE ONLY WITH		-		03946 08918 07646
D FULL CARBON rear adjustmer (Lightest configuration) Ve	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre si nt plate with integrated m ersion mudguard (AVAIL ersion straight sideguard with the required hei etween HIGH frame and LOW	ight sideguard iudguard traight sideguard nudguard - Polished ABLE ONLY WITH	REAR WHEELS	24") ssembly hole). mall size fork (H1	15)	08918
Front height - Tick the box of The possible difference in height be	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre st nt plate with integrated m ersion mudguard (AVAIL ersion straight sideguard with the required hei stween HIGH frame and LOW <i>Casters</i>	ight sideguard iudguard traight sideguard nudguard - Polished ABLE ONLY WITH ABLE ONLY WITH	REAR WHEELS	24") ssembly hole). mall size fork (H1	15) □ ~ 47	08918
COW FRAME 90° rront height (min 44,5 - max 50)	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre st nt plate with integrated m ersion mudguard (AVAIL ersion straight sideguard with the required hei tween HIGH frame and LOW Casters 3"	ight sideguard iudguard traight sideguard nudguard - Polished ABLE ONLY WITH ABLE ONLY WITH	REAR WHEELS	24") ssembly hole). <i>mall size fork (H1</i>		08918
COW FRAME 90° Front height (min 44,5 - max 50)	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre st nt plate with integrated m ersion mudguard (AVAIL ersion straight sideguard with the required hei tween HIGH frame and LOW Casters 3"	ight sideguard iudguard traight sideguard nudguard - Polished ABLE ONLY WITH ght / frame is 3cm (with sam fork (H95) ~45 □~46	REAR WHEELS	24") ssembly hole). mall size fork (H1 rs	□~47	08918 07646
COW FRAME 90° Front height (min 44,5 - max 50) Footplate distance (min 33)	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre st nt plate with integrated m ersion mudguard (AVAIL ersion straight sideguard with the required hei tween HIGH frame and LOW Casters 3"	ight sideguard iudguard traight sideguard hudguard - Polished ABLE ONLY WITH ght / frame is 3cm (with sau fork (H95) ~45 □~46 ~46 □~47	REAR WHEELS	24") ssembly hole). mall size fork (H1 's □ ~45,5 □ ~46,5	□~47 □~48	08918 07646
Cov FRAME 90° Font height (min 44,5 - max 50) Covplate distance (min 33) FIGH FRAME 90° Front height (min 47,5 - max 53)	emovable ABS fibre strai emovable carbon fibre m emovable Carbon fibre st nt plate with integrated m ersion mudguard (AVAIL ersion straight sideguard with the required hei tween HIGH frame and LOW Casters 3" 4" 5" Casters	ight sideguard iudguard traight sideguard hudguard - Polished ABLE ONLY WITH ght / frame is 3cm (with sau fork (H95) ~45 □~46 ~46 □~47	REAR WHEELS	24") ssembly hole). mall size fork (H1 's □ ~45,5 □ ~46,5	□~47 □~48	08918 07646
DFULL CARBON rear adjustmer (Lightest configuration) Ve DFULL CARBON rear adjustmer (Lightest configuration) Ve	emovable ABS fibre strai emovable carbon fibre memovable Carbon fibre st emovable Carbon fibre st nt plate with integrated me ersion mudguard (AVAIL ersion straight sideguard with the required hei tween HIGH frame and LOW Casters 3" 4" 5" Casters 3" 3"	ight sideguard iudguard traight sideguard hudguard - Polished ABLE ONLY WITH ght / frame is 3cm (with sau fork (H95) ~45	REAR WHEELS	24") ssembly hole). mall size fork (H1 's □ ~45,5 □ ~46,5	□~47 □~48 □~49	08918 07646

 Rear height

 Rear wheels
 22" (min 36 - max 44)

 Rear wheels
 24" (min 38 - max 46)

 Rear wheels
 25" (min 39 - max 47)

 Rear wheels
 26" (min 41 - max 48)

Pag. 1 / 6

The difference between Font Height and Rear Height must be in the 3 - 12 cm range.

Printed on 05-2021

ACTIVE DESIGN	עבט	ļ	Order Form			
Date	Order		En: User nar	glish me	Address	
Footplate						
Aluminium footplat	e, rake adjustable					
☆ Interna		al	□ Exte	ernal □ 2/3 External		<u>r</u>
						•
O Aluminium footplat	e - rake and depth a	ljustable				07649
☆ Interna	al □ 2/3 Intern	al	□ Exte	ernal □ 2/3 External		
One piece Carbon	fibre footplate, rake a	idjustable				03346
a Interna	al			ernal		
Seat						
Seat cloth with poo	cket (under seat)					
Seat with tension s	straps					08883
Carbon rigid seat						08336
O Pocket (under se	eat) [25x11x4,5]					08281
Rear wheels axle						
Aluminum rear who	eels axle					
Carbon fiber rear v	vheels axle		(I	Lightest configuration)		07647
Backrest						
	straps and padded tra					
	siraps and padded ira			Aluminium backres	st 👘	
					U	
				O Titanium backrest		06811
					U	
				O Carbon fibre backre	est	04389
400						
Carbor	ed posture backrest a shell - Lateral retainir	(NOT REMOVABL	E)			
	adjustment ±1cm An ilable for seat width 48	gle adjustment ±10°				
H 28	H 34		40	Installation on: ☆ Backrest tubes		
Backrest Height (T			40 Height (TS)			
min 34	min 38		n 44	□ Aluminium backres	st 🖌	
()	_ateral retaining wing A=)	-		
AR		R A	R	O Titanium backrest	Ű	06811
				O Carbon fibre backre	est 7	04389
					I	
				J		



Order Form




ACTIVE DESIGN		English	
Date Order	User	name Address	
Handle tube			
☐ Handle tube with short tubes			
□ Handle tube SPORT Without push handles ○ Carbon fibre handle (with short tubes)		(Lightest configuration)	04390
Not available with: Posture backrest PH	YSIO - Posture back	est AIR	
Folding handles aluminium			ຍ່ 02958
Casters			
] 3" Sport		(Lightest configuration)	
5" Soft			
O 3" Active Soft (wide)	(Aluminium alloy rim)	06824
0 4" Active Sport (narrow)	(Aluminium alloy rim)	01398
0 4" Active Soft (wide)	(Aluminium alloy rim)	03943
5" Active Soft (wide)	(Aluminium alloy rim)	07518
0 5" Pneumatic	(-h)		10844
Colour set: Rear wheels and forks - To be ma	atched only with:Rear 22" 24" 25" 26"	wneels Ultra-light Progeo - Standard! (22 -	24)
a Black D Bright silver	22 24 25 26 22" 24"		00833
D Bright anthracite	22 24 24"		00833
D Bright orange	22" 24"		00833
 Bright fuchsia Bright blue 	22" 24" 22" 24"		00833 00833
D Bright red	22" 24"		00833
) Bright lime	22" 24"		00833
> Pearl white	24"		00833
Rear wheels			
24" Ultra-light Progeo - Standard!			
22" Ultra-light Progeo - Standard!			
25" Ultra-light Progeo - Standard!	(colour: black)		
26" Progeo - Standard!	(colour: black)		
24" ULTRA-LIGHT PROGEO KEY SPORT	Weight reduction app	prox. 450gr.	04383
24" Ultra-light "Spinergy LX"			01685
0 24" Ultra-light "Spinergy LXL"	Black hub and white		07846
 24" Ultra-light "Spinergy Flex rim" 25" Ultra-light "Spinergy LX" 	Integrated aluminium	/rubber nandrim	02270 02101
D 25" Ultra-light "Spinergy LXL"	Black hub and white	e spokes	07847
0 26" Ultra-light "Spinergy LX"			02102
24" Off-road (aluminium handrim black)			01392
Rear wheel tyre			
ধ High pressure tyre	(22"-24"-25"-26")	(Lightest configuration)	
□ High pressure profile tyre	(24")		
 Marathon Plus Anti-puncture - Colour Grey 	(24"-25") (22")	with anti-puncture protection	01669 04181
D Solid tyre Kik Mako - Colour Black	(24")		01041
) Solid tyre Kik Mako - Colour Grey	(24")		01751
Handrim - Wheel distance	☆ 3 cm	□ 4 cm	
Aluminium	(22"-24"-25"-26")	(Lightest configuration)	
Aluminium black SOFT-TOUCH	(24"-25")	(24" handrim, on 25" wheel is installed with spacers	s) 09170
Chromed Steel	(24"-25")	(24" handrim, on 25" wheel is installed with spacers	•
 Titanium Ultra Grepp 	(24"-25") (24"-25")	(24" handrim, on 25" wheel is installed with spacers (24" handrim, on 25" wheel is installed with spacers	•
D Max Grepp	(24"-25")	(24" handrim, on 25" wheel is installed with spaces	•
) Ergo Para	(24")		00632
	(24"-25")	(24" handrim, on 25" wheel is installed with spacers	5) 11023
D TOP FRICTION	(24"-25")	(24" handrim, on 25" wheel is installed with spacers	s) 11025
 TOP FRICTION Oval countour with a rubber insert NOVA H 		(24" handrim, on 25" wheel is installed with spacers	5) 11025
 DOP FRICTION Oval countour with a rubber insert NOVA H Ergonomic black profile SURGE LT 	(25")	(24" handrim, on 25" wheel is installed with spacers Oval countour with a rubber insert	06427
 TOP FRICTION Oval countour with a rubber insert NOVA H 	(25") (24")		, ,

	Order Form	OKER CARBON
Date Order	English User name Addru	ess
Wheel locks ☆ Bent lever push to lock		
Straight lever Push to lock		E.
□ Straight lever Pull to lock		
O Sport brake	(Lightest configuration)	06428
		n
O Brake with extension lever push to lock		01949
O Brake with extension lever pull to lock		03372
Armrests		
O Swing away armrests	(Swing away, removable and height adjustable armrest)	00694
Accessories O Pad for front frame protectors		07058
O Backrest-seat connection cloth		10241
O Removable storage bag (with quick coupling	g)	09811
Optional 1		
Only one optional devices for side can	be chosen	
O Transit wheels	Exclude the installation of Anti-tippers	03290
O Anti-tipper BASE	Exclude the installation of Transit wheels O Right	06819
	O Left	06820
O Anti-tipper with rapid hookup	Exclude the installation of Transit wheels	3
(inside rotation to reduce the encumbrance)		06821
	O Right O Left	06821
Optional 2		
O Push handles for companion	(Removable and height adjustable)	03645
		111
O Tetraclip	(Quick release axle for quadriplegic)	03947
O Safety pelvic belt		03972
O Lumbar support	(to insert in the backrest upholstery)	00013
······		
O Swing away lateral support	Not available with: Posture backrest PHYSIO - Posture backres	it A I R
	O Right	02097
	O Left	02098
O Spoke guards Black	(22"-24")	01043
O Spoke guards Transparent	(22"-24")	00835
 Spoke guards Progeo design Spoke guards Dragon 	(22"-24") (22"-24")	00019 02106
Additional Kit		
O 24" Off-road rear wheels	Off-Road tyre - aluminium handrim (black colour)	03378
O 24" FAT rear wheels	FAT tyre 3" - aluminium handrim (black colour)	09357
Pag. 4 / 6	Printed on 05-2021	Rev. 2021.2



Order Form English



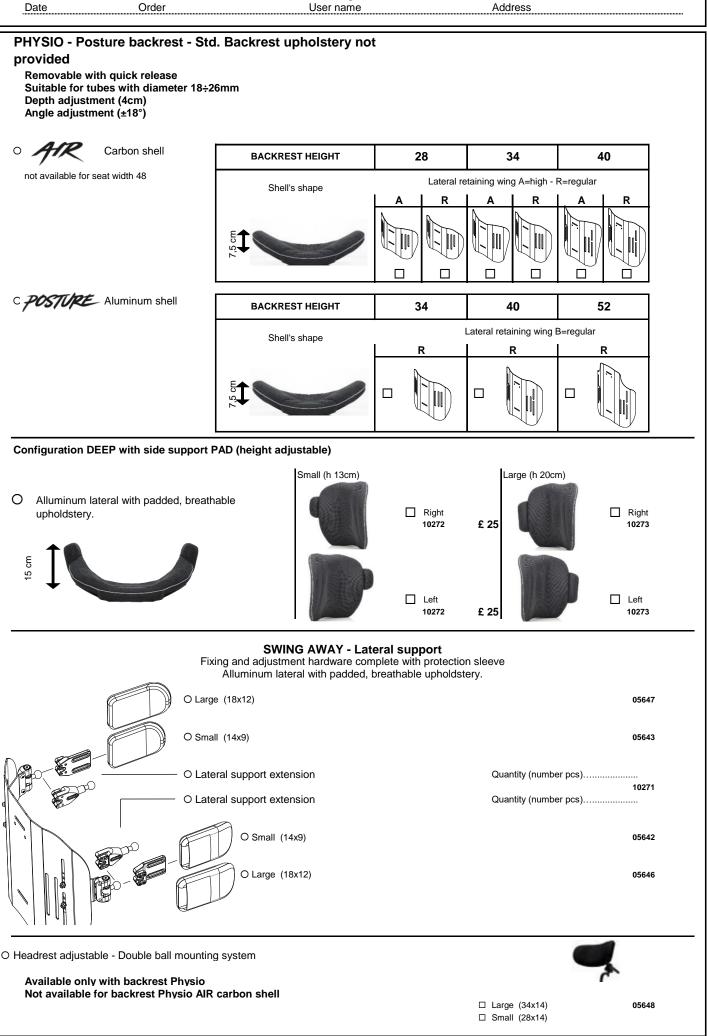



Order

Order Form English

User name



Date

Address

